



T5




Reported to internal components



T 5

DRAWING

Switch series Touch

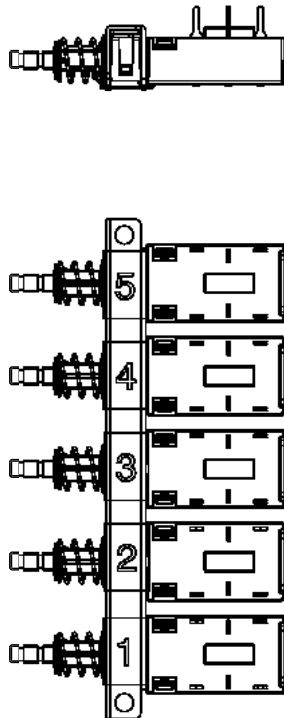

TYPICAL APPLICATIONS Cooker hoods, coffee machines, microwave ovens

FUNCTIONS Switch Keyboard
 ■ SPST, momentary or not
 ■ SPDT, momentary or not
 ■ DPST, momentary or not
 ■ DPDT, momentary or not

CYCLE No. 10.000

CUT OUT -

AMBIENT TEMPERATURE 110 °C


GWT 850 °C

GWT NO FLAME (<2sec) 750 °C


?

PITCH BETWEEN SWITCHES


A Pitch 17.5 mm

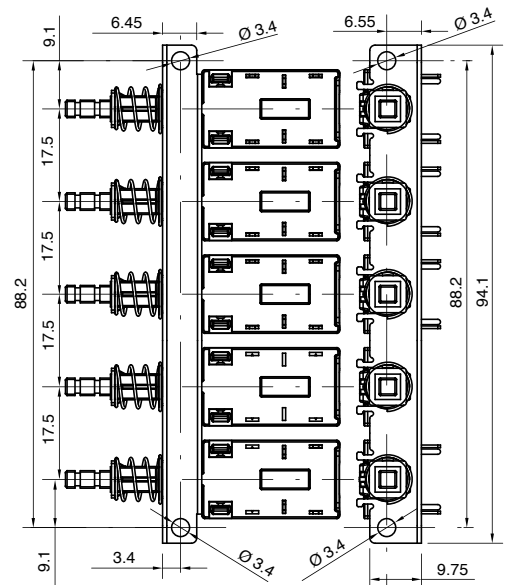

B Pitch 20 mm


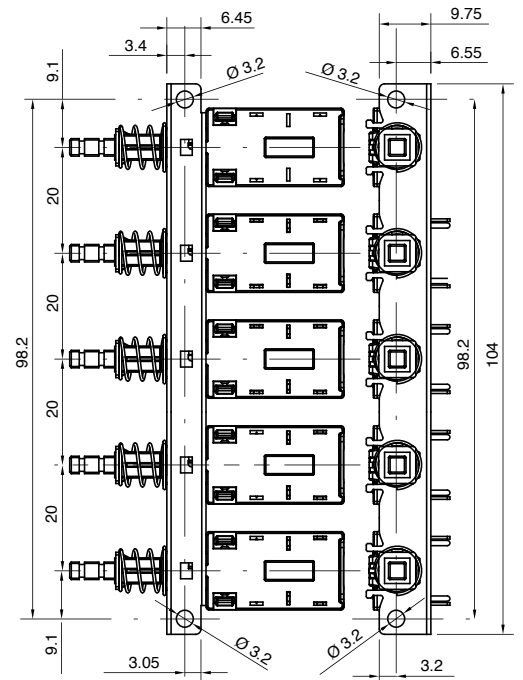


Drilling cut out for PCB

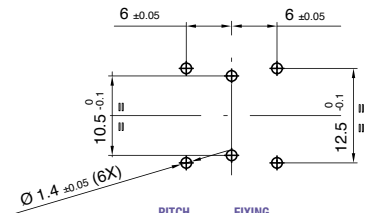

PITCH BETWEEN SWITCHES	FIXING TYPE AND TERMINALS	ACTUATOR TYPE	FUNCTION SWITCH 1	FUNCTION SWITCH 2	FUNCTION SWITCH 3	FUNCTION SWITCH 4	FUNCTION SWITCH 5	RATING
T	5							0 0 0 W

?	?	?	?	?	?	?	?	?
FIXING TYPE AND TERMINALS	ACTUATOR TYPE	FUNCTION SWITCH 1	FUNCTION SWITCH 2	FUNCTION SWITCH 3	FUNCTION SWITCH 4	FUNCTION SWITCH 5	RATING	
								0 0 0 W

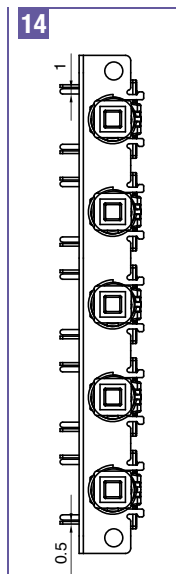

1	2	3	4	7	B	L	M	Z
Reset								Reset

2	3
5 (2) A / 250 VAC T85 °C 6 A / 125 VAC T65 °C	8 (3) A / 250 VAC T110 °C 6 A / 125 VAC T65 °C