


30 **cverel**

THE WORLD IN A CLICK



SLIDE AND ROTARY SWITCHES

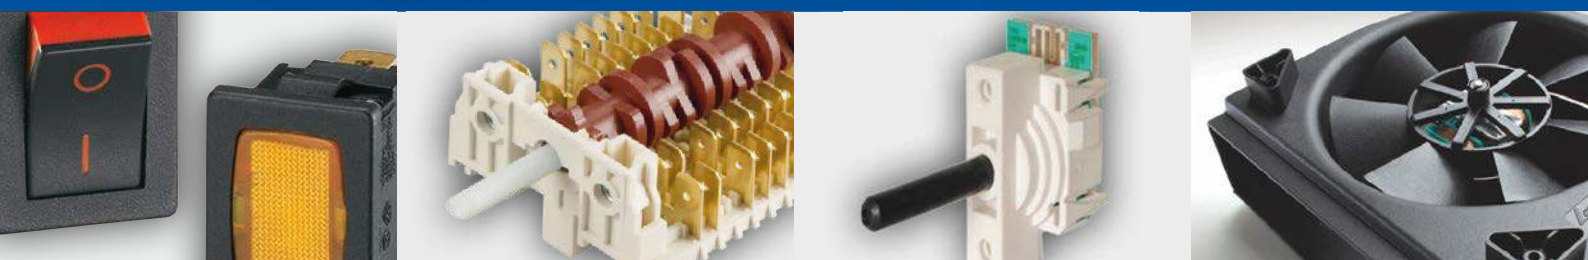

Dreefs

 **SIGNAL LUX**

givem

MOLVENO

 **KAUTT & BUX**

Slide and Rotary Switches

01



LF

134



P5

136



R1

138



DS

140



DH

141



LF

TYPICAL APPLICATIONS	Cooker hoods, hairdryers
FUNCTIONS	1 step, SP or DP 2 steps, DP 3 steps, DP
CYCLE No.	10.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C



DRAWING



LF2




LF3




LF4


2

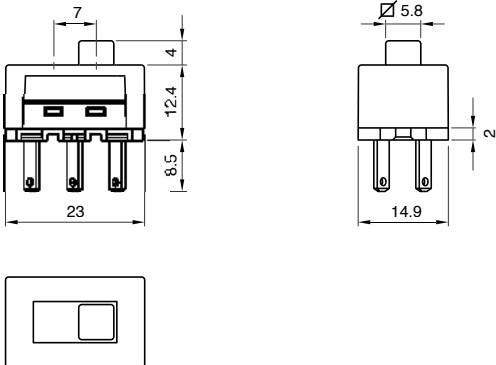


3

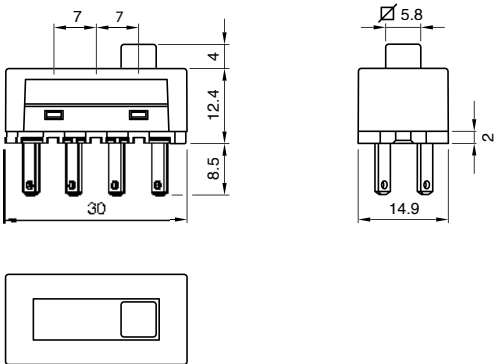


4

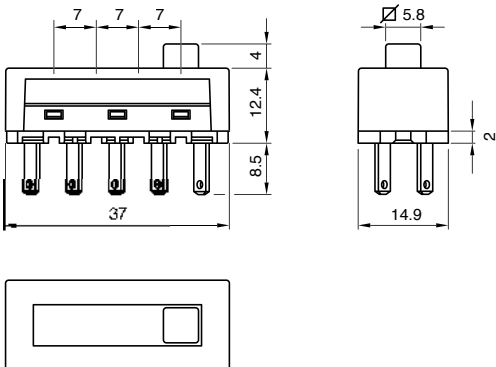




LF2



LF3



LF4

DRAWING	TERMINAL	FUNCTION	RATING				
L	F			0	0	0	W

?

TERMINAL

?

FUNCTION

?

RATING


0

0


0

W


1



2




4




Drawing 2


A



B



E




3

8 (3) A / 250 VAC
T125 °C
EN 61058


8 A / 125 VAC
T65 °C
UL 1054

Drawing 3

A




B




Drawing 4

A



B





P5


TYPICAL APPLICATIONS	Cooker hoods, hairdryers
FUNCTIONS	■ 5 steps, DP
CYCLE No.	10.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand




P

5

DRAWING

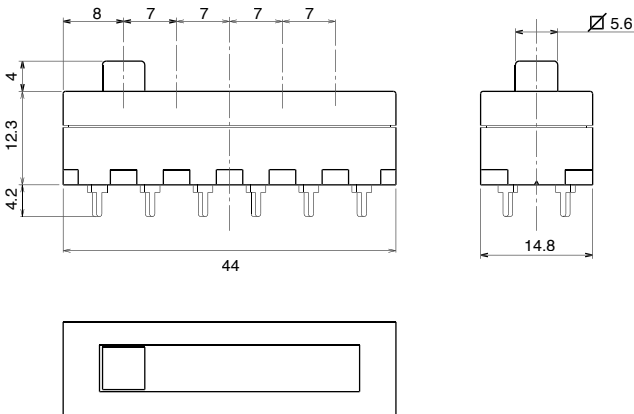

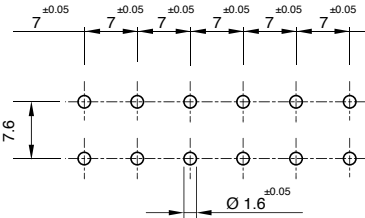

	RATING	FUNCTION	TERMINAL			
P	5			0	0	0

?

RATING

?

FUNCTION

?

TERMINAL

0

0


0

L


10 A / 250 VAC
5 (5) A / 250 VAC
T125/55 °C
EN 61058

13 A / 125 VAC
6.5 A / 250 VAC
T65 °C
UL 1054


A




B




C



0



4





R1

TYPICAL APPLICATIONS	Fan heaters, small ovens, cleaners
FUNCTIONS	■ 30° steps (up to 6 positions), SP or DP
CYCLE No.	10.000 (50.000 on demand)
CUT OUT	28 mm interaxes screws
AMBIENT TEMPERATURE	150 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand






R 1

DRAWING

?

TERMINAL

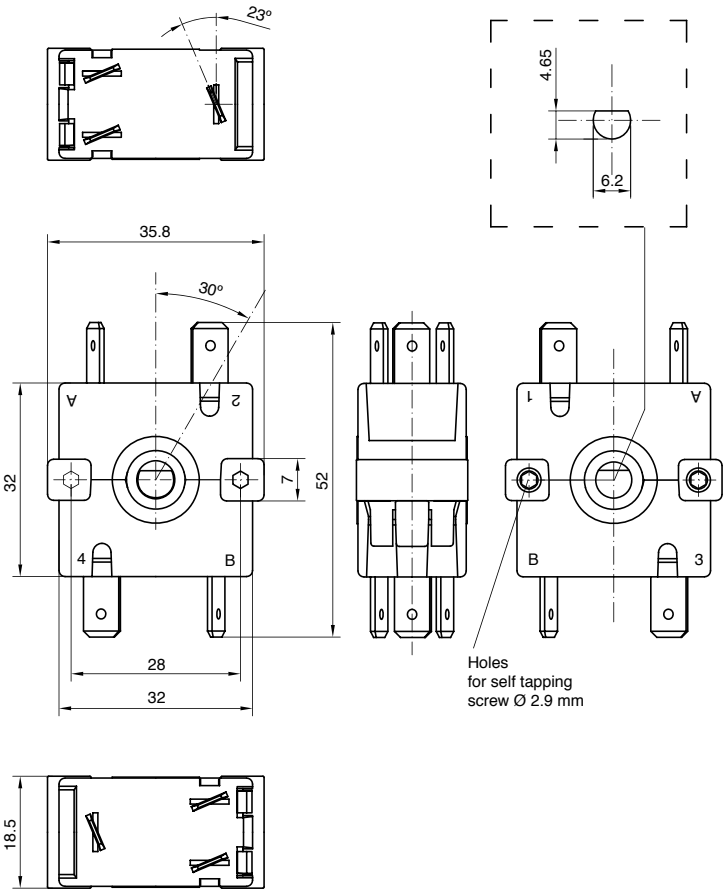



		TERMINAL	FUNCTION	RATING	SHAFT		
R	1					0	0

FUNCTION

[illegible]

D1

D2

A

B

A \ B	0	1	2	3
0	0	1	1	1
1	1	1	1	1
2	1	1	1	1
3	1	1	1	1

D3

A	B	C	1	2	3	4
0	0	0	0	0	0	0
0	0	1	0	0	0	0
0	1	0	1	1	1	1
0	1	1	1	1	1	1
1	0	0	0	0	0	0
1	0	1	0	0	0	0
1	1	0	1	1	1	1
1	1	1	1	1	1	1

D5

	A	B		
1	●	●	●	●
2				●
3		●	●	
4			●	

[illegible]

D8

A

B

A \ B	0	1	2
0	0	1	1
1	1	1	1
2	1	1	1

1

2

3

4

D9

A

B

A \ B	0	1	2	3
0	0	1	2	3
1				●
2				●
3		●	●	●

E4

A 1 2

B 3 4

A	B		
a	b		
		●	●
		●	●
			●
		●	
		●	

FA

	A	B
1	●	●
2	●	●
3	●	●
4	●	●

FU

The diagram shows a 3x3 grid world. The robot is at the top-left cell (1,1). The goal is at the bottom-right cell (3,3). Obstacles are located at (1,2), (1,3), (2,1), and (2,3). The robot's possible actions are labeled 1 (right) and 2 (down). The bottom row is labeled 3.

	A	B	C	D
1	Robot	Obstacle	Obstacle	Obstacle
2	Obstacle	Obstacle	Goal	Obstacle
3	Obstacle	Obstacle	Obstacle	Obstacle

G4

The diagram shows a 4x4 grid with inputs A and B on the left. The outputs are labeled 1, 2, 3, and 4. The grid contains black dots in the following cells (row, column): (1, 2), (1, 3), (1, 4), (2, 1), (2, 4), (3, 3), (3, 4), (4, 3), (4, 4).

G6

1 2 3 4

A 1 2

B 3 4

•	•	•	•
	•		•
		•	•
		•	

GE

H2

RATING

1
13 (3) A / 250 VAC
6 (6) A / 250 VAC
T150 °C
EN 61058

13 A / 125 VAC
T65 °C
UL 1054

SHAFT

0 No shaft

1

Technical drawing of a shaft with a keyway. The shaft has a total length of 26.6 and a keyway width of 4.5. The keyway is located 6 units from the right end. A cross-section view below shows the keyway profile.

Shaft also available separately R019000

Shaft also available separately R019000

2

Technical drawing of a shaft with a central hole. The shaft has a total length of 22.6 and a diameter of 4.5. The central hole has a diameter of 6. The drawing includes a side view and a cross-sectional view.

Shaft also available separately R023000

Shaft also available separately R023000

3

Technical drawing of a shaft with a pulley. The shaft has a diameter of 6 mm. The pulley has a total width of 4.5 mm and a height of 11.1 mm. A cross-section view below shows the shaft with a keyway.

Shaft also available separately R022000

Shaft also available separately R022000

4

The drawing shows a cross-section of a mechanical part. It features a central vertical shaft with a diameter of 4.65. The shaft is mounted on a base with a total width of 6.05. The shaft has a length of 12.8. A hatched area indicates a specific material or feature on the shaft. The drawing includes dimension lines and arrows indicating the measurements.

Shaft also available separately R104000




DS

TYPICAL APPLICATIONS	HVAC
FUNCTIONS	■ 45° steps (with 3 or 5 rest positions), SP
CYCLE No.	50.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	85 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand




DRAWING

DS37

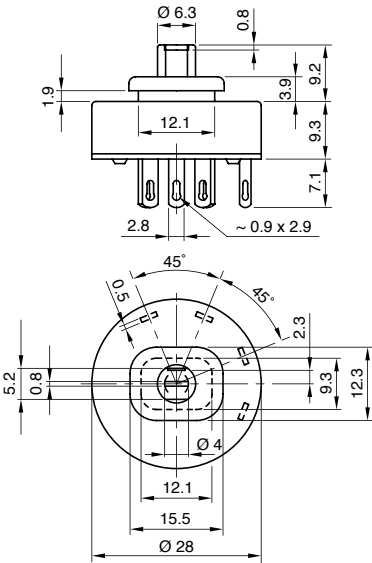



FUNCTION



RATING

2 (2) A / 250 VAC - 5E4
T85 °C
EN 61058
2A / 250 VAC
T65 °C
UL 1054

DS51

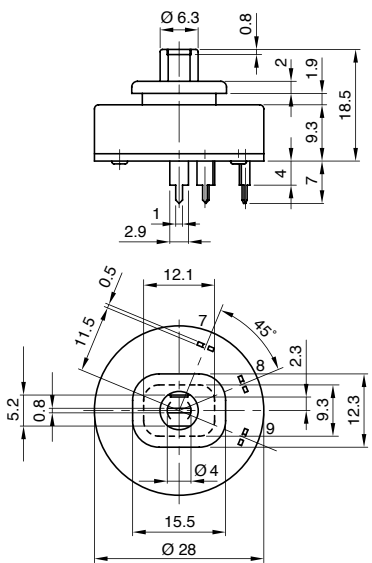



DH

TYPICAL APPLICATIONS	Circulation pumps
FUNCTIONS	■ 45° steps (with 3 positions), SP
CYCLE No.	10.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	85 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C





DRAWING

FUNCTION

RATING


DH3

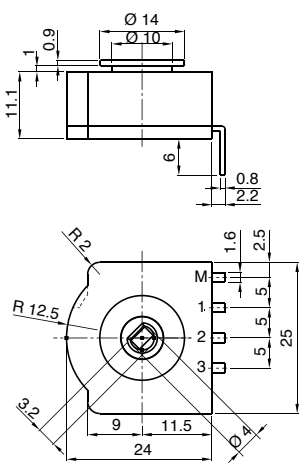

2 (2) A / 250 VAC
1 (0.5) A / 250 VAC
T85 °C
EN 61058

2A / 125 VAC
T85 °C
UL 1054

DH4

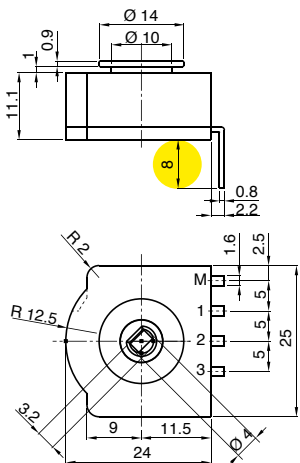



- Headquarter
- Production Site
- Sales Network



Everel Group S.P.A.

[Headquarter - Production Site]

Via Cavour, 9

37067 Valeggio sul Mincio (VR) - Italy

tel. +39 045 6313711

fax +39 045 6313730

Dreefs GmbH

[Production Site]

Ernst-Dreefs-Straße 7

96364 Marktrodach - Germany

tel. +49 9261 9610

fax +49 9261 961248

Everel Romania S.r.l.

[Production Site]

Calea Timisorii 109

Lipova - Arad - Romania

tel. +40 257 563087

fax +40 257 563086

www.everelgroup.com

