

2CH with encoder

TYPICAL APPLICATIONS Electronic and electrical function selector

WIRING DIAGRAMS ■ On demand

CYCLE No. 30.000

AMBIENT TEMPERATURE 85 °C

ADDITIONAL FEATURES ■ Solution combining selector and encoder functions, that allows to improve flexibility and compactness



Solution combining selector and encoder functions, that allows to improve flexibility and compactness.

Rating

16 (6) A / 250 VAC

10 (2) A / 400 VAC

18 A / 250 VAC

6 (4) A / 250 VAC

T 150 °C

According to

EN61058-1 standard

3/4 HP / 125 VAC


16 A / 250 VAC

13.8 A / 250 VAC

T 85 °C

According to

UL 1054

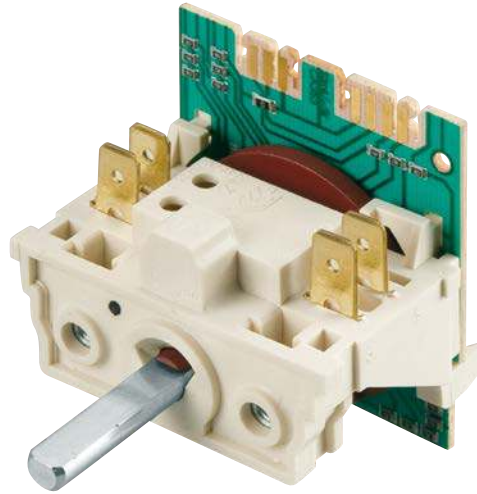

DIMENSIONS

