

30
cverel
THE WORLD IN A CLICK



MINICODI



Dreelfs

SIGNAL LUX

giwrem

MOLVENO

KAUTT & BUX

Minicodi

04

**MS**

199

**MF**

200

**MB**

200

**MV**

201

**MK**

202

MINICODI



Encoders display different dimensions and mounting systems on the control panel. Dimensions vary a lot depending on the different applications. MINICODI series as potentiometer can be coupled with selector switches.

ADDITIONAL FEATURES

- Golden contacts
- 360° with or without end stop
- Different mounting solutions available:
snap-in or M4 screws or serif tapping screws
- Push to select version available
- Coupling with function selector switches
- Miniature encoder
- 2-bit digital output (incremental function)
- Typical use for analogical / resistive applications
- Permitted angular tolerance: +/ -2°
- End stops: ≥ 100 Ncm
- Operating torque: custom
- Edge connectors

Rating
20 mA / 5 VDC
T 85 °C

MINICODI - INCREMENTAL ENCODER

The mechanical encoder with digital output are available in absolute or incremental code. The shaft rotation, in the incremental output, generates pulses that, sent to the microprocessor, determine a "relative" position. The counts of pulses continue with the rotation of the shaft, which allows the position to change infinitely, or as the microprocessor allow. Direction may be determined by analyzing difference between the two channels.

Example of incremental encoder configuration with gray code

Detent	Ang.	Output		
		C	1	2
1	0°	■	■	
2	30°	■	■	■
3	60°	■		■
4	90°	■		
5	120°	■	■	
6	150°	■	■	■
7	180°	■		■
8	210°	■		
9	240°	■	■	
10	270°	■	■	■
11	300°	■		■
12	330°	■		

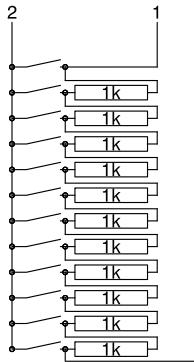
Example of incremental encoder obtained with momentary positions

Pos.	Ang.	Output	
		1	2
1 momentary	+30°	■	
0 stable	0		
2 momentary	-30°		■

MINICODI - POTENTIOMETER


The potentiometer is a mechanical encoder with resistive analogical output. The potentiometer version can be implemented either using a continuous "carbon" layer or a resistor array. The potentiometer has a rotation that can be infinite or steps (positions). Push to select function available.

Potentiometer resistor array



Pos.	Ang.	2	1	3
1	0°	10K	11K	
2	30°	1	10K	
3	60°	2K	9K	
4	90°	3K	8K	
5	120°	4K	7K	
6	150°	5K	6K	
7	180°	6K	5K	
8	210°	7K	4K	
9	240°	8K	3K	
10	270°	9K	2K	
11	300°	10K	1K	
12	330°	11K	10	

Potentiometer carbon film



Value between P- and S	Detent	Ang.	Output voltage %
	1	0°	0%
	2	35°	11%
	3	70°	22%
	4	105°	33%
	5	140°	44%
	6	175°	56%
	7	210°	67%
	8	245°	78%
	9	280°	89%
	10	315°	100%

endstop

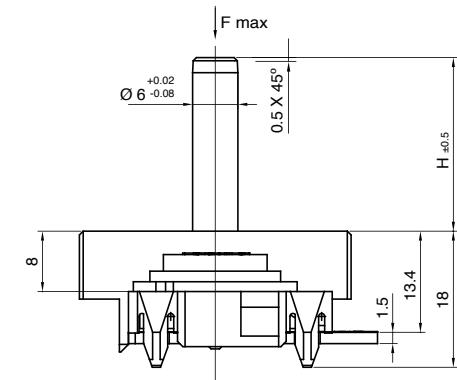
MS

MINICODI	FIXING TYPE	H SHAFT (mm)	NUMBER OF POSITIONS
MS1	Screw m4	■ 11 ■ 13 ■ 16 ■ 18 ■ 20,4 ■ 23	■ Free rotation 360° ■ Free rotation with mechanical stop ■ Positions number: min. 2 - max 21 with or without mechanical stop ■ Double momentary
MS2	Self tapping screw		

MS1



MS1

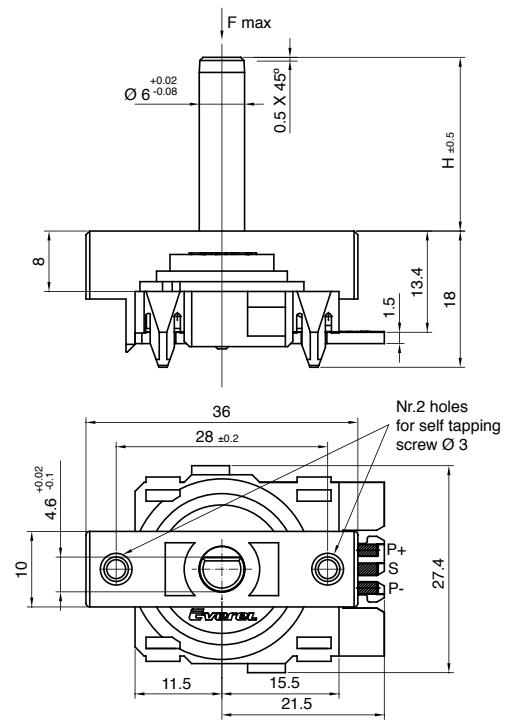


MS2



MS1 encoder, body standard version with M4 screw fixing type.

MS2



MS2 encoder, body standard version with self tapping screw fixing type.

MF

MINICODI	FIXING TYPE	H SHAFT (mm)	NUMBER OF POSITIONS
MF	▪ Self tapping screw ▪ Snap in	▪ 23	▪ 3 P ▪ 6 P ▪ 8 P ▪ 10 P ▪ 12 P

MF

Front View Dimensions:

- Total height: 23 ±0.5
- Shaft height: 10 ±0.1
- Shaft diameter: 4.6 ±0.1
- Shaft length: 24.4 ±0.02
- Shaft width: 8.7 ±0.2
- Shaft thickness: 26.4
- Shaft center: 42.1

Side View Dimensions:

- Total height: 36
- Shaft height: 23
- Shaft diameter: 11 ±0.2
- Shaft width: 8.1 ±0.05
- Shaft thickness: 28 ±0.2
- Shaft center: 36
- Shaft angle: 90° ±0.05
- Shaft position: 0.05 ±0.05

Pinout:

- P+
- S
- P-

MF encoder, version with snap in fixing type or self tapping fixing type.

MB

MINICODI	FIXING TYPE	H SHAFT (mm)	NUMBER OF POSITIONS
MB1	Screw m4	▪ 13,7 cross ▪ 23	▪ Free rotation with 1 position at 0° ▪ Free rotation with 20 positions
MB2	Snap in		

MB1

Front View Dimensions:

- Total height: 41.3
- Shaft height: 23 ±0.5
- Shaft diameter: 4.6 ±0.02
- Shaft length: 8.6
- Shaft width: 15.1
- Shaft thickness: 8.2
- Shaft center: 145°

Side View Dimensions:

- Total height: 41
- Shaft diameter: Ø 6 ±0.08
- Shaft width: 17
- Shaft thickness: M4

Pinout:

- a
- b
- c

MB2

Front View Dimensions:

- Total height: 31.5
- Shaft height: 13 ±0.02
- Shaft diameter: 6.8
- Shaft width: 24.9 ±0.02
- Shaft thickness: 15.1
- Shaft center: 1.6

Side View Dimensions:

- Total height: 44 ±0.3
- Shaft diameter: Ø 10 ±0.10
- Shaft width: 17
- Shaft thickness: 28
- Shaft center: 4

Pinout:

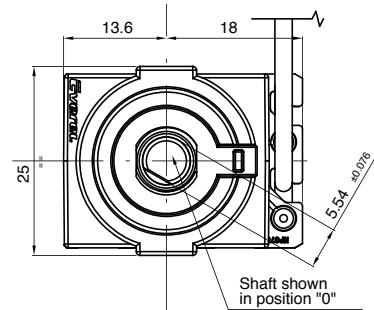

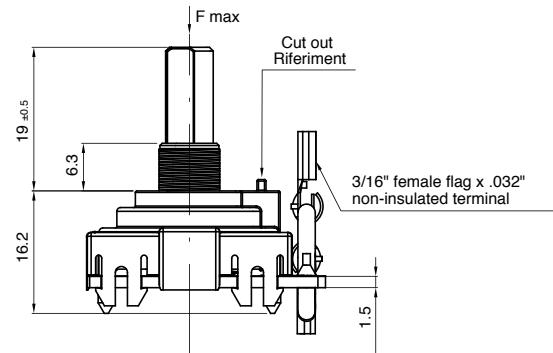
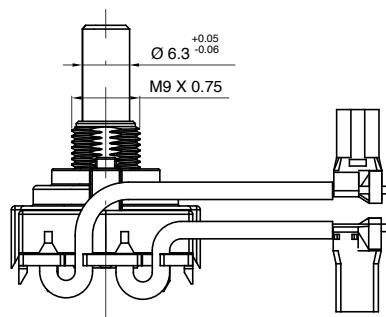
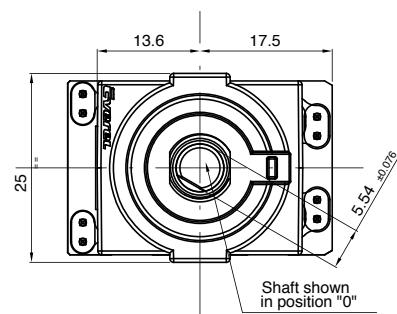

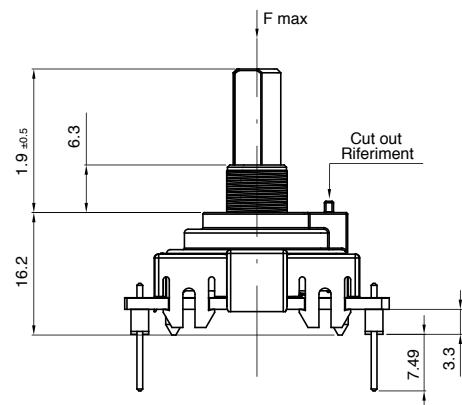

- a
- b
- c

MB1 encoder, version with M4 screw fixing type.

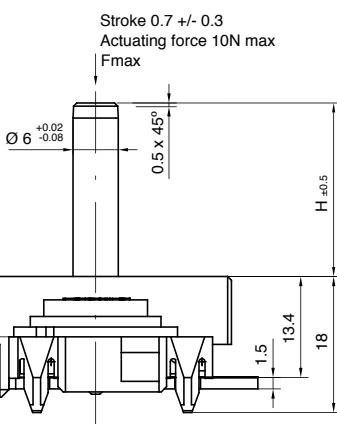
MB2 encoder, version with snap in fixing type.

MV

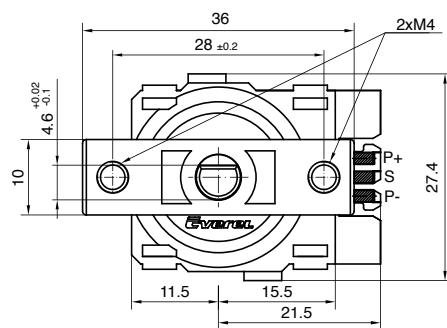
MINICODI	FIXING TYPE	H SHAFT (mm)	NUMBER OF POSITIONS
MV1	Threaded ring	■ 12,7	■ Free rotation 360° with stop
MV2	Soldering pin		

MV1**MV2**

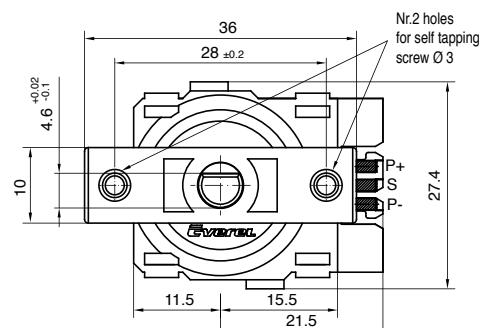
MINICODI	FIXING TYPE	H SHAFT (mm)	NUMBER OF POSITIONS
MK1	Screw m4	■ 13 ■ 18,7 ■ 23 ■ 24	■ 21 positions free rotation ■ 20 positions free rotation ■ Double momentary
MK2	Self tapping screw		

SHAFT**PUSH TO SELECT**

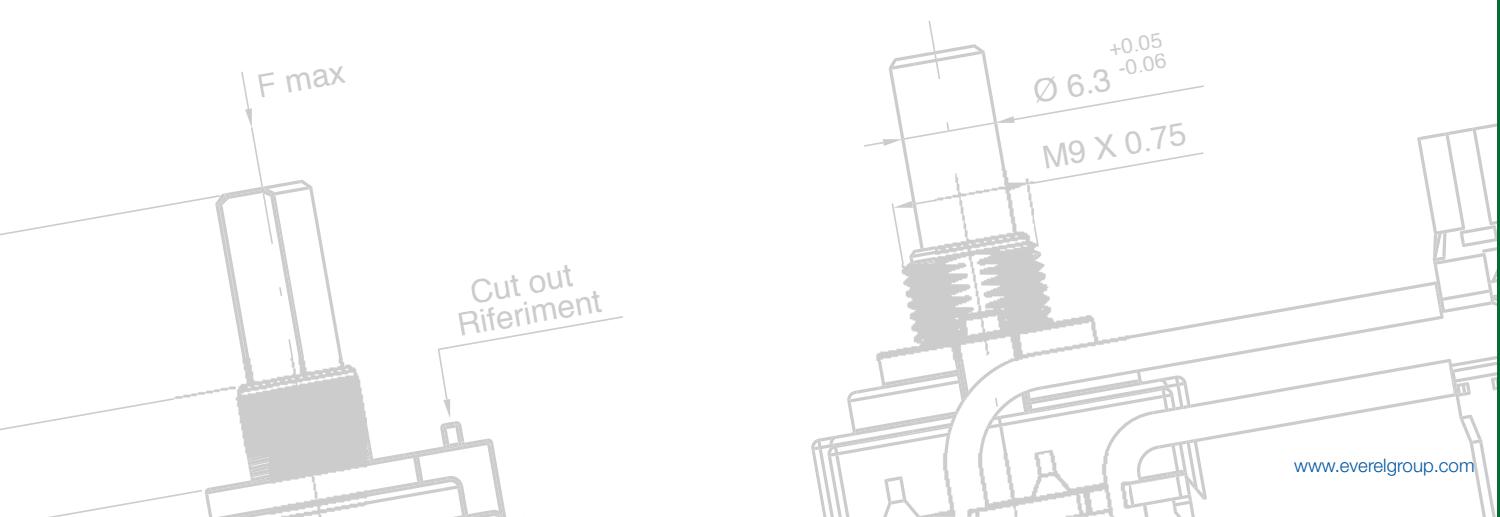
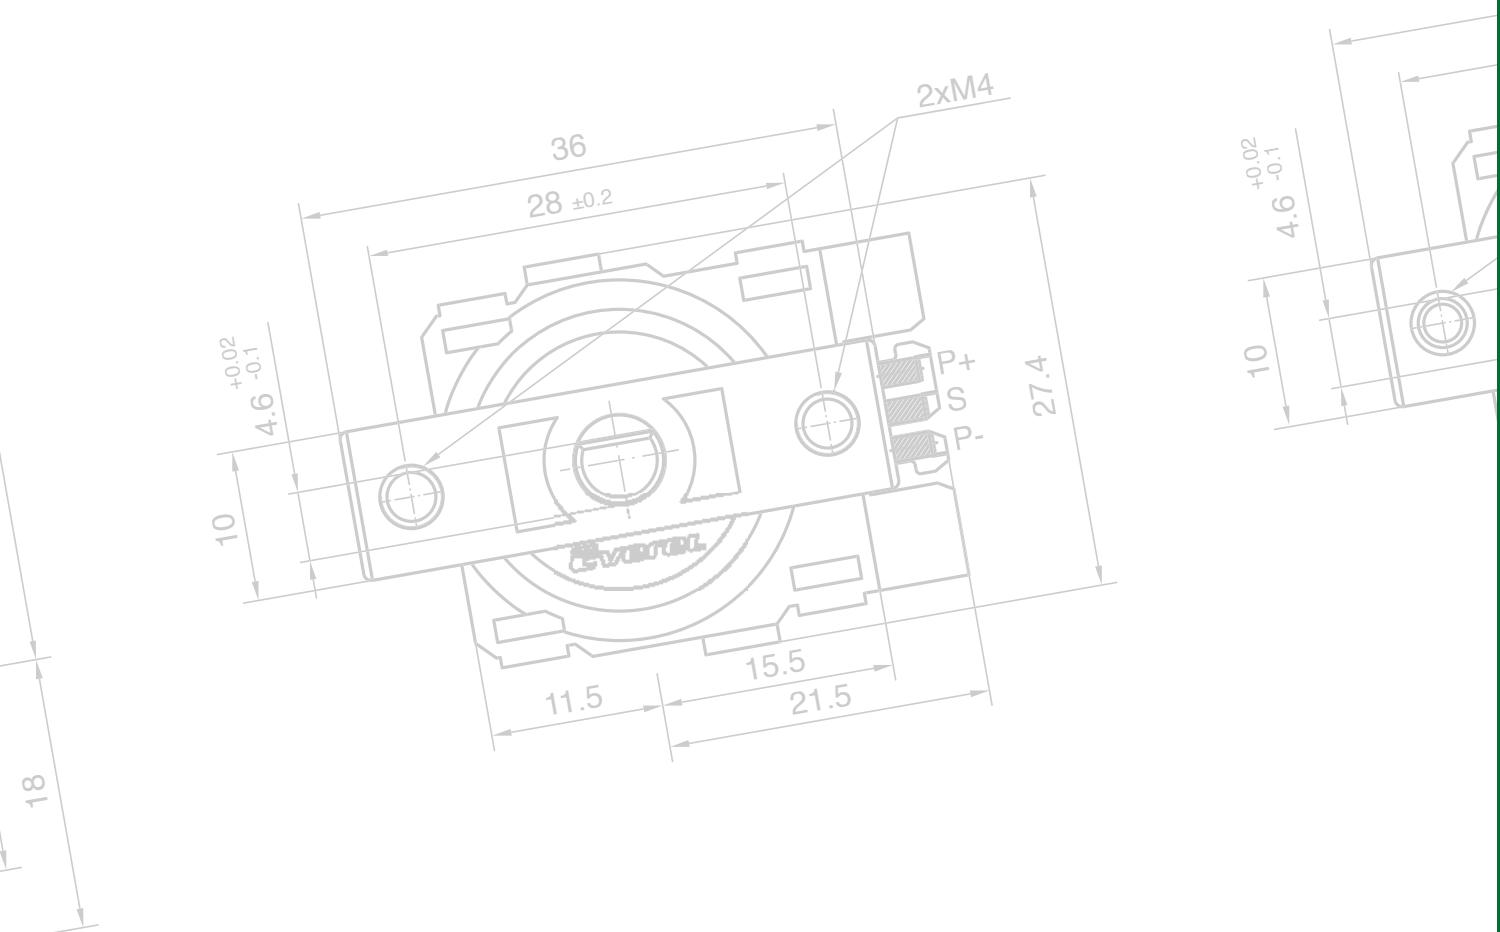
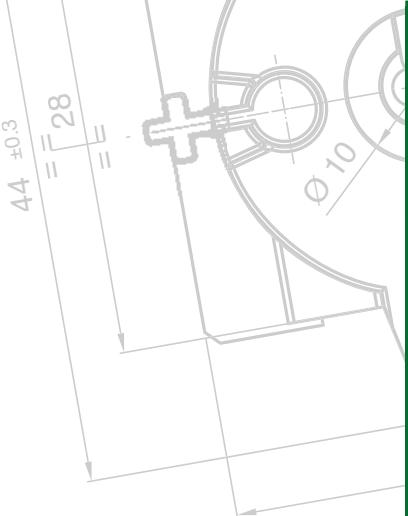
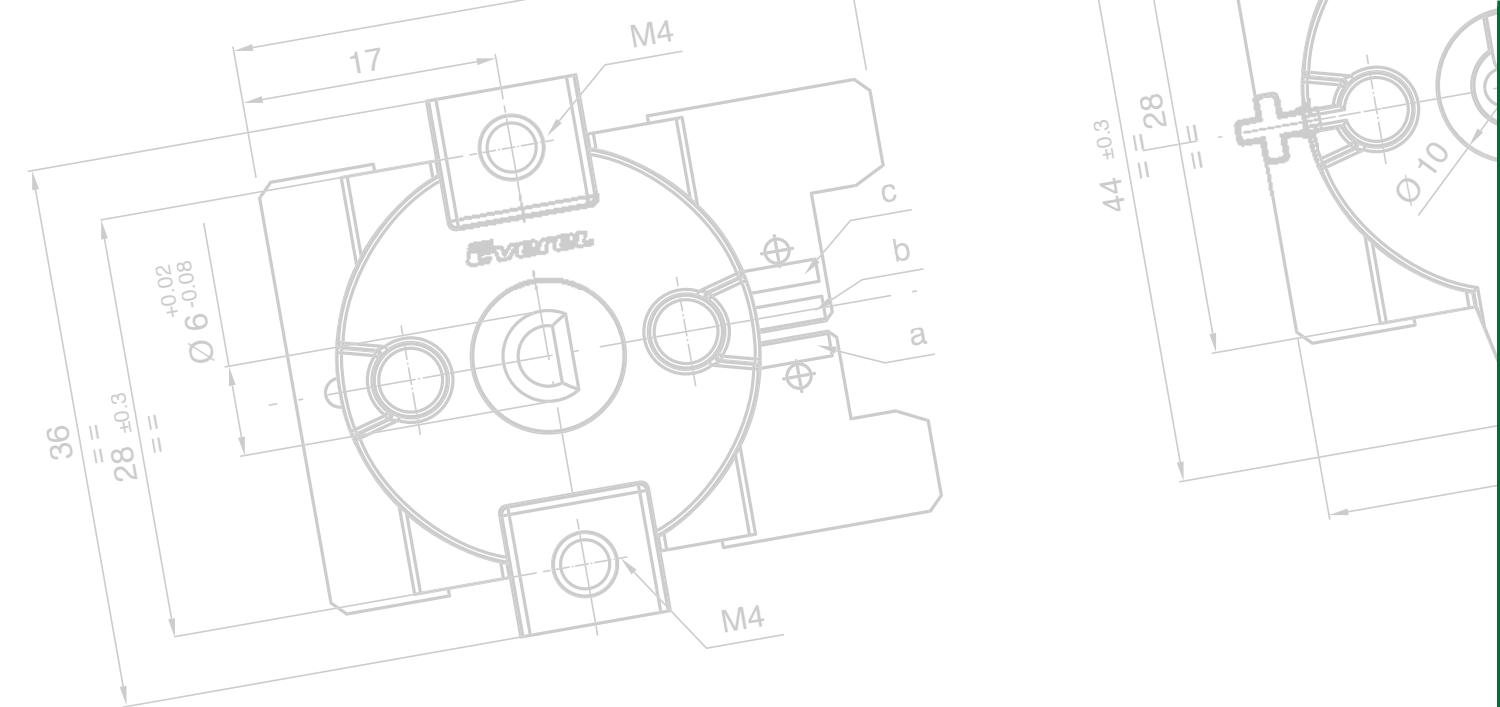
The push to select accessory is used to select a scroll menu function and to confirm the selected value (i.e. temperature).

MK1**MK1****MK2**

MK1 encoder, version with M4 screw fixing type.

MK2

MK2 encoder, version with self tapping screw fixing type.





Everel Group S.p.A.

[Headquarter - Production Site]
Via Cavour, 9
37067 Valeggio sul Mincio (VR) - Italy
tel. +39 045 6313711
fax +39 045 6313730

Dreefs GmbH

[Production Site]
Ernst-Dreefs-Straße 7
96364 Marktrodach - Germany
tel. +49 9261 9610
fax +49 9261 961248

Everel Romania S.r.l.

[Production Site]
Calea Timisiorii 109
Lipova - Arad - Romania
tel. +40 257 563087
fax +40 257 563086

www.everelgroup.com

