

S X ? ?

SERIES

CUT OUT

?

DRAWING


24



○  
ø 6 mm  
th 0.5 ... 2 mm





○  
ø 6 mm  
th 0.5 ... 1 mm

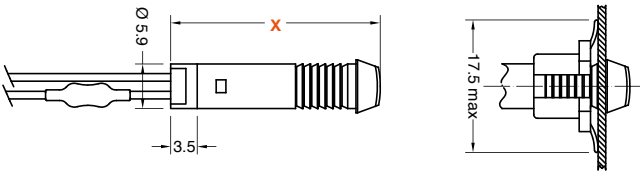


0 X = 24.2 mm

2 X = 23 mm





5

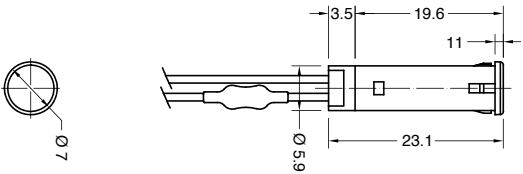

27



○  
ø 6 mm  
th 0.5 ... 3 mm

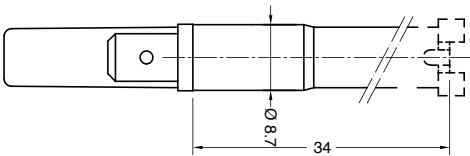



5 No lens 2 clips


0 Drawing 5 + lens

2 Drawing 5 + lens


8 Drawing 5 + lens



Lens available also separately SX27T0...



Lens available also separately SX27T2...





Lens available also separately SX27T8...

N No lens 4 clips


A Drawing N + lens

C Drawing N + lens


E Drawing N + lens



Lens available also separately SX27T0...



Lens available also separately SX27T2...




Lens available also separately SX27T8...


| S | X | SERIES | DRAWING | TERMINAL | FUNCTION | VOLTAGE | TEMP. | COLOUR | WIRES | 0 | 0 |
|---|---|--------|---------|----------|----------|---------|-------|--------|-------|---|---|
|   |   |        |         |          |          |         |       |        |       |   |   |

| ?        | ?        | ?       | ?           | ?      | ?     | ? | ? | ? | ? | ? | ? |
|----------|----------|---------|-------------|--------|-------|---|---|---|---|---|---|
| TERMINAL | FUNCTION | VOLTAGE | TEMPERATURE | COLOUR | WIRES |   |   |   |   |   |   |


### 1 Series 27 Tabs 6.3 x 0.8




### C Series 27 Signal Click




### K Series 27 Wires crimped




### P Series 24 Wires locked with plug




### R Series 27 Wires sealed




### 1 Series 24 - 27




### 2 Series 27




### 3 Series 27




### 5 Series 24 - 27



### 6 Series 24 - 27 Terminal 1 - P



### 7 Series 27 Terminal C - K - R



### 1 Function 5

2 V

### 2 Function 3 - 5

12 V

### 3 Function 3 - 5

24 V

### 4 Function 1 - 2 - 6 - 7

110 V

### 5 Function 1 - 2 - 6 - 7

125 V

### 6 Function 1 - 2 - 6 - 7

230 V

### 7 Function 1 - 2 - 6 - 7

250 V

### 8 Function 1 - 2

400 V

VDE or UL certified

**?**  
Available  
on demand

**X**  
Custom

### A

T 75 °C

### 1 Function 1-2-3

T 90 °C

### 2 Function 1 - 2

T 120 °C

### 3 Function 1 - 2

T 150 °C

### SERIES 24

### ILLUMINATED ✨

**G** red

**H** orange

**E** green

**L** white

### SERIES 27

Drawing 5 - N

### NO LENS ✨

**0** red light

**1** green light

Drawing  
0 - 2 - 8 - A - C - E

### ILLUMINATED ✨

**G** red

**H** orange

**E** green

**L** white

**X** ?  
custom

### 000 Terminal 1 - C

Indicator light without wires

### ??? Terminal K - P - R

Indicator light with wires

Wires Material:

- PVC (up to T90 °C)
- SILICONE (up to T200 °C)

Wires Length:

from 60 mm to 600 mm  
(special version available  
up to 1.450 mm)

Wires Ends:

- pre-stripped  
(from 5.5 to 18 mm)
- stripped (from 5.5 to 18 mm)
- not stripped
- crimp terminals