

S X ? ?

SERIES

CUT OUT

?

DRAWING


24



○
ø 6 mm
th 0.5 ... 2 mm





○
ø 6 mm
th 0.5 ... 1 mm

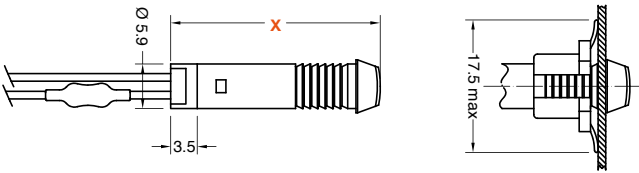

0 X = 24.2 mm



2 X = 23 mm



27



○
ø 6 mm
th 0.5 ... 3 mm

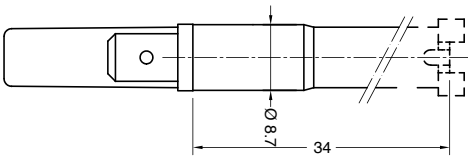



5 No lens 2 clips


0 Drawing 5 + lens

2 Drawing 5 + lens


8 Drawing 5 + lens



Lens available also
separately SX27T0...



Lens available also
separately SX27T2...





Lens available also
separately SX27T8...

N No lens 4 clips


A Drawing N + lens

C Drawing N + lens


E Drawing N + lens



Lens available also
separately SX27T0...



Lens available also
separately SX27T2...




Lens available also
separately SX27T8...


S	X	SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES	0	0

?	?	?	?	?	?	?	?	?	?	?	?
TERMINAL	FUNCTION	VOLTAGE	TEMPERATURE	COLOUR	WIRES						


1 Series 27 Tabs 6.3 x 0.8




C Series 27 Signal Click




K Series 27 Wires crimped




P Series 24 Wires locked with plug




R Series 27 Wires sealed




1 Series 24 - 27




2 Series 27




3 Series 27




5 Series 24 - 27



6 Series 24 - 27 Terminal 1 - P



7 Series 27 Terminal C - K - R



1 Function 5

2 V

2 Function 3 - 5

12 V

3 Function 3 - 5

24 V

4 Function 1 - 2 - 6 - 7

110 V

5 Function 1 - 2 - 6 - 7

125 V

6 Function 1 - 2 - 6 - 7

230 V

7 Function 1 - 2 - 6 - 7

250 V

8 Function 1 - 2

400 V

VDE or UL certified

?

Available
on demand

X

Custom

A

T 75 °C

1 Function 1-2-3

T 90 °C

2 Function 1 - 2

T 120 °C

3 Function 1 - 2

T 150 °C

SERIES 24

ILLUMINATED ✨

G red

H orange

E green

L white

SERIES 27

Drawing 5 - N

NO LENS ✨

0 red light

1 green light

Drawing
0 - 2 - 8 - A - C - E

ILLUMINATED ✨

G red

H orange

E green

L white

X ?
custom

000 Terminal 1 - C

Indicator light without wires

??? Terminal K - P - R

Indicator light with wires

Wires Material:

- PVC (up to T90 °C)
- SILICONE (up to T200 °C)

Wires Length:

from 60 mm to 600 mm
(special version available
up to 1.450 mm)

Wires Ends:

- pre-stripped
(from 5.5 to 18 mm)
- stripped (from 5.5 to 18 mm)
- not stripped
- crimp terminals