

S X ? ?

SERIES

CUT OUT


?

DRAWING

27





ø 8 mm
th 0.5 ... 2 mm



M No lens

P Drawing M + lens

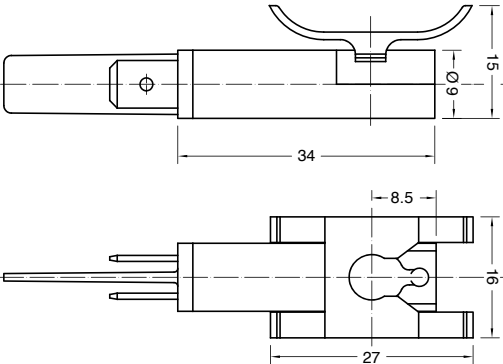


Lens available also separately SX27TP...

28





Custom

9 No lens

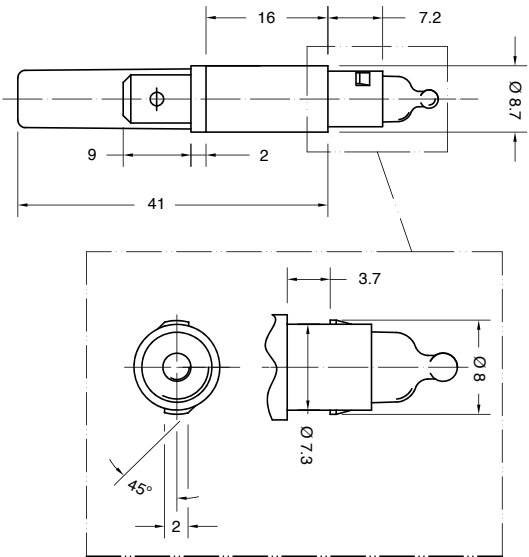

6 Drawing 9 + lens

F Drawing 9 + lens




Lens available also separately SX28T6...

Lens available also separately SX28TF...

Further lens shapes available on demand

H One piece

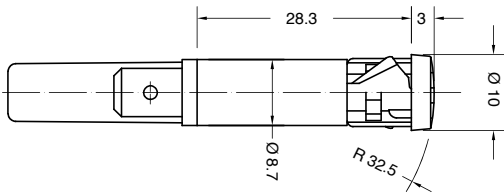

ø 9 mm
th 0.8 ... 2 mm




ø 9 mm
th 0.8 ... 2 mm


SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES		
S	X							0	0

?	?	?	?	?	?	?	?	?	?
TERMINAL	FUNCTION	VOLTAGE	TEMPERATURE	COLOUR	WIRES				


1 Series 27 - 28 Tabs 6.3 x 0.8




C Series 27 - 28 Signal Click




K Series 28 Wires crimped




R Series 27 - 28 Wires sealed




1 Series 27 - 28




2 Series 27 - 28




3 Series 27 - 28




5 Series 27 - 28



6 Series 28 Terminal 1



7 Series 28 Terminal C - K - R



1 Function 5

2 V

2 Function 3 - 5

12 V

3 Function 3 - 5

24 V

4 Function 1 - 2 - 6 - 7

110 V

5 Function 1 - 2 - 6 - 7

125 V

6 Function 1 - 2 - 6 - 7

230 V

7 Function 1 - 2 - 6 - 7

250 V

8 Function 1 - 2

400 V

VDE or UL certified

?

Available
on demand

X

Custom

A

T 75 °C

1

Function 1 - 2 - 3

T 90 °C

2

Function 1 - 2

T 120 °C

3

Function 1 - 2

T 150 °C

NO LENS

0

red light

1

green light

ILLUMINATED

G

red

H

orange

E

green

L

white

X

custom

?

000 Terminal 1 - C

Indicator light without wires

??? Terminal K - R

Indicator light with wires

Wires Material:

- PVC (up to T90 °C)
- SILICONE (up to T200 °C)

Wires Length:

from 60 mm to 600 mm
(special version available
up to 1.450 mm)

Wires Ends:

- pre-stripped
(from 5.5 to 18 mm)
- stripped (from 5.5 to 18 mm)
- not stripped
- crimp terminals