




# 5HE 4 BLOCK



<b>TYPICAL APPLICATIONS</b>	Hobs control
<b>WIRING DIAGRAMAS</b>	7 positions
<b>GWFI</b>	850 °C
<b>GWT NO FLAME (&lt;2sec)</b>	750 °C

This solution integrates all wirings of four 5HE 7TAKT in a single body; robustness, compactness and easy mounting are its best features.

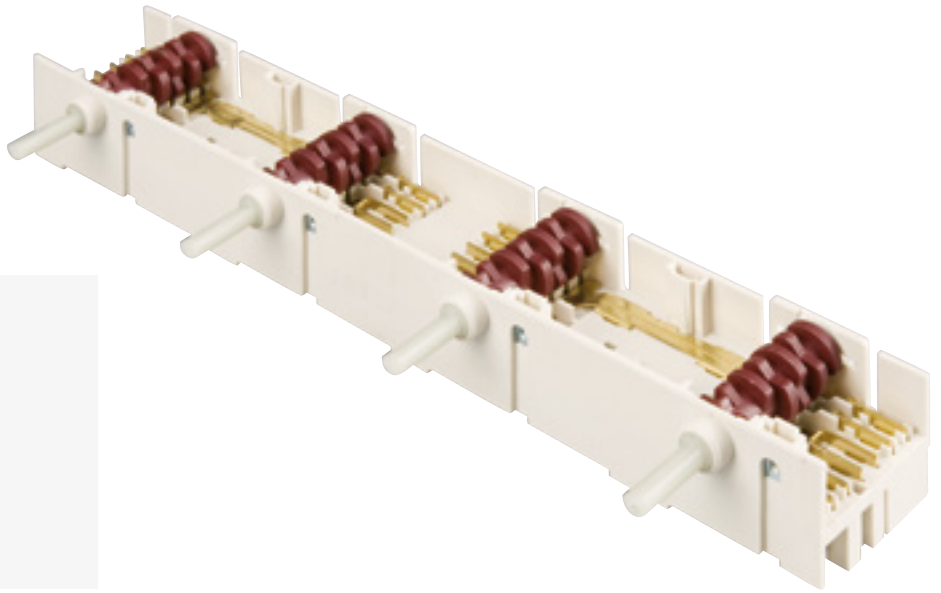

### RATING

**12 A / 400 VAC - 30E3**  
**T150 °C**  
**According to EN 61058-1**

16 A / 250 VAC  
 T120 °C  
 According to UL 61058-1

### DIMENSIONS

#### 2 versions:

L = 247.35  
 D = 65 ±0.2

L = 230.45  
 D = 60 ±0.2

