

DY2



TYPICAL APPLICATIONS

Cooking, washing, coffee machines

FUNCTIONS

- DPST, momentary or not
- SPST+SPDT, momentary or not

CYCLE No.

50.000

CUT OUT

Rear panel

AMBIENT TEMPERATURE

125 °C

GWT

850 °C

GWT NO FLAME (<2 sec)

750 °C

D

Y



2

DRAWING






TERMINAL

1

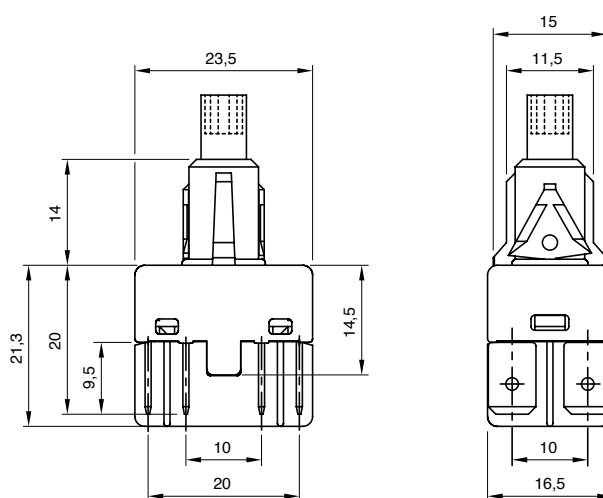

6

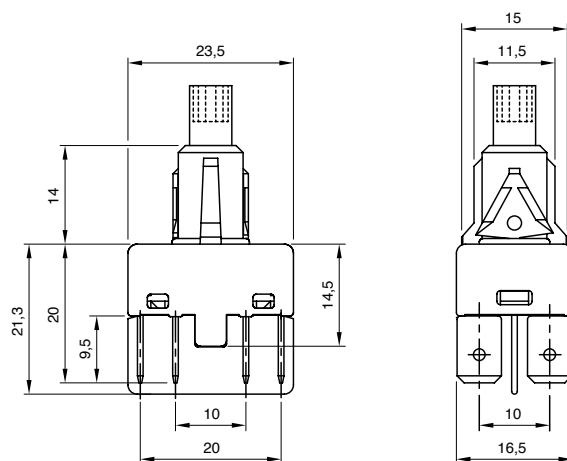



D	Y	2						0	0	0
TERMINAL	SHAFT	LATCHING FUNCTION	FUNCTION	RATING						



SHAFT



LATCHING FUNCTION




FUNCTION



RATING

E




S Push to On - Push to Off



M Momentary



11




E

Function 11


16 (6) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
EN 61058-1

16 (6) A / 250 VAC
 14 A GP / 250 VAC
 3/4 HP - 250 VAC
 1/3 HP - 125 VAC
 T120/55 °C
 UL 61058-1

K



13



P

Function 13

- Side switch 1-2
16 (6) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
EN 61058-1

16 (6) A / 250 VAC
 14 A GP / 250 VAC
 3/4 HP - 250 VAC
 1/3 HP - 125 VAC
 T120/55 °C
 UL 61058-1

- Side change over 5-6-7
12 (4) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
μ disconnection
EN 61058-1

13 A GP / 250 VAC
 3/4 HP - 250 VAC
 1/3 HP - 125 VAC
 T120/55 °C
 μ disconnection
 UL 61058-1