

P1



TYPICAL APPLICATIONS	Cooking, small appliances, HVAC
FUNCTIONS	<ul style="list-style-type: none"> ■ SPST momentary, illuminated or not ■ DPST momentary
CYCLE No.	50.000
CUT OUT	ø 16 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand





DRAWING

2



WATERPROOF CAP

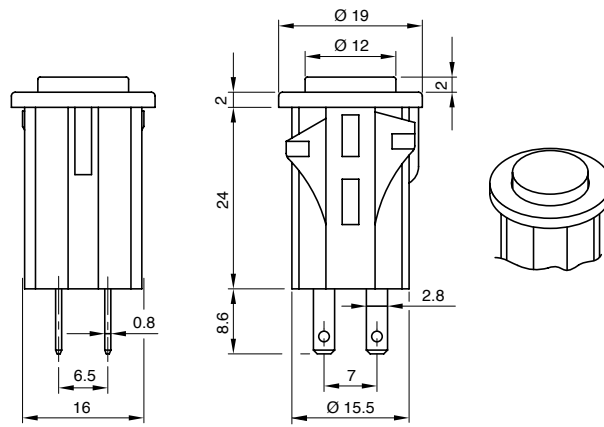

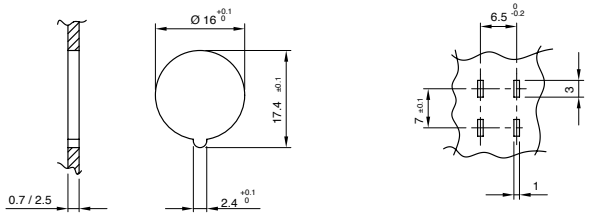

- P
- 1
-
-
-
-
-
-
- 0
- 0
- 0

DRAWING FUNCTION RATING BODY COLOUR BUTTON COLOUR MARKING COLOUR MARKING




FUNCTION

4

7

N

P



RATING

3

3 (1) A / 250 VAC
0.5 A / 250 VAC - 5E4
T125 °C
EN 61058

On demand

2A/125 VAC
T65 °C
UL 1054




BODY COLOUR

1
black

2
white

X ?
custom



BUTTON COLOUR

1
black

2
white


5
grey

9
red

ILLUMINATED ✨

G
red

X ?
custom



MARKING COLOUR

0
none

1
black

2
white

X ?
custom



MARKING

0

7

8

X