




P5




TYPICAL APPLICATIONS	Cooker hoods, hairdryers
FUNCTIONS	■ 5 steps, DP
CYCLE No.	10.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand



DRAWING

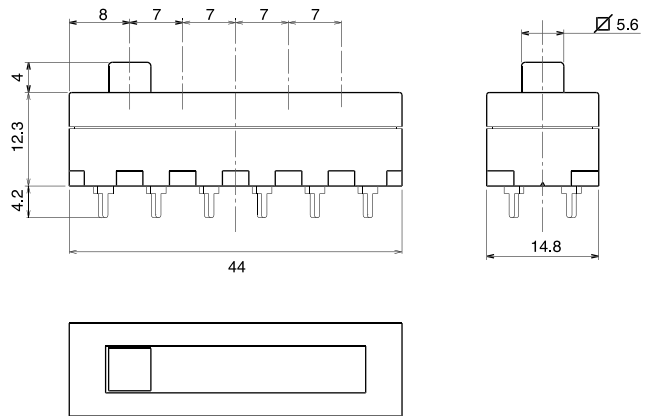



P **5** **0** **0** **0**

RATING FUNCTION TERMINAL


RATING

L

10 A / 250 VAC
 5 (5) A / 250 VAC
 T125/55 °C
 EN 61058

13 A / 125 VAC
 6.5 A / 250 VAC
 T65 °C
 UL 1054

FUNCTION

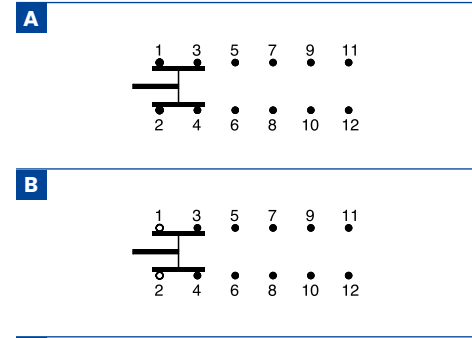

TERMINAL

