

# SP60



## TYPICAL APPLICATIONS

Vacuum and steam cleaners

## FUNCTIONS

- SPST, momentary or not
- SPST, illuminated or not
- DPST, illuminated or not

## CYCLE No.

50.000

## CUT OUT

ø 25 mm

## AMBIENT TEMPERATURE

120 °C

## GWT

850 °C

## GWT NO FLAME (<2sec)

750 °C on demand

S

P

6


0

## DRAWING


## TERMINAL





WATERPROOF CAP

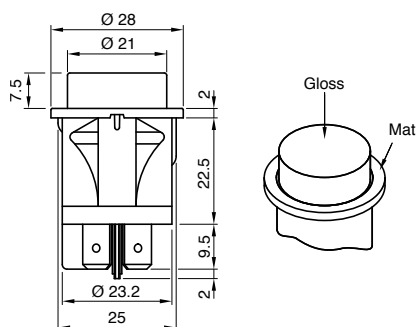



1




A

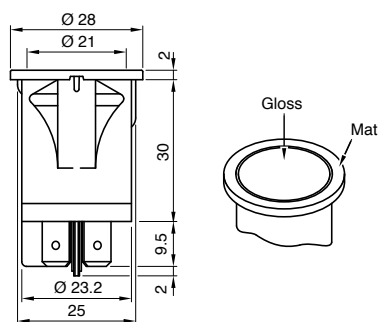



2

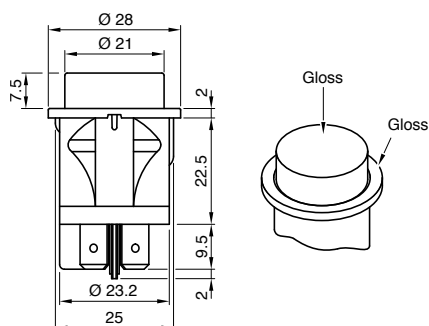

4



D

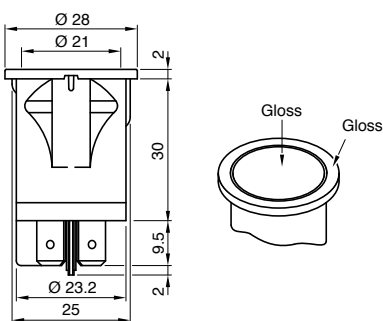

5

