

SXL44




| | |
|---------------------------------|--|
| TYPICAL APPLICATIONS | Steam cleaners |
| FUNCTIONS | <ul style="list-style-type: none"> ■ SPST, momentary or not ■ SPST, illuminated or not ■ DPST, momentary or not ■ DPST, illuminated or not |
| PROTECTION DEGREE | IP 65 |
| CYCLE No. | 50.000 |
| CUT OUT | 19x13 mm |
| AMBIENT TEMPERATURE | 125 °C |
| GWT | 850 °C |
| GWT NO FLAME (<2 sec) | 750 °C |




DRAWING




TERMINAL

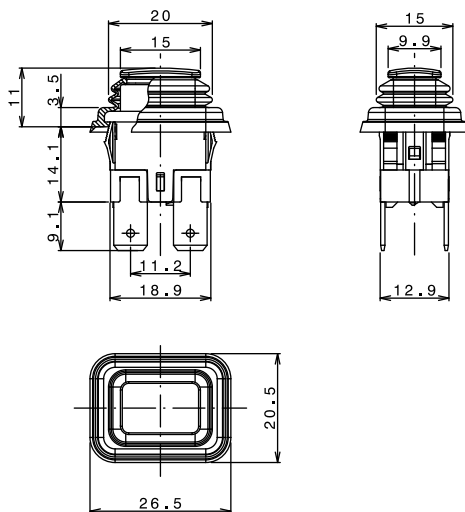


1 Terminal 6.3x0.8



2 Terminal 4.8x0.8



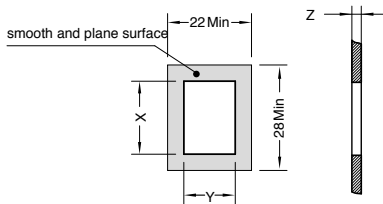

| Z | Y | X |
|-------------|------|-----------|
| 0,5 ... 1,2 | 12,9 | +0,1 0 |
| 1,2 ... 2,0 | 12,9 | +0,1 0 |

S X L 4 4 S O O W

TERMINAL FUNCTION RATING RUBBER COLOUR BUTTON COLOUR MARKING COLOUR MARKING

| FUNCTION | RATING | RUBBER COLOUR | BUTTON COLOUR | MARKING COLOUR | MARKING |
|--------------|--|-------------------|---|--|----------------------------------|
| 1 | H 16 (4) A / 250 VAC 12 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058-1 | 1 black | R red M white N black | 0 none 1 black 2 white X custom | 0 R X |
| 2 | 16 (4) A - 125 / 250 VAC 12 (10) A - 125 / 250 VAC 1/2 HP - 125 VAC 3/4 HP - 250 VAC T125/55 °C UL 61058-1 | | ILLUMINATED ✨ G red H orange E green L white F blue X custom | | |
| 4 | 9 12 (8) A / 250 VAC - 5E4 T85/55 °C EN 61058-1 16 (4) A - 125 / 250 VAC 12 (10) A - 125 / 250 VAC 1/2 HP - 125 VAC 3/4 HP - 250 VAC T125/55 °C UL 61058-1 | | | | |
| 6 | | | | | |
| 7 | | | | | |
| 8 | | | | | |
| R | | | | | |